



W L I V E



CLJT003 Trash can

V1.0

Please be sure to properly save the manual for confirmation at any time.

Before using, please carefully read the manual and use it on the basis of full understanding.

Product Introduction

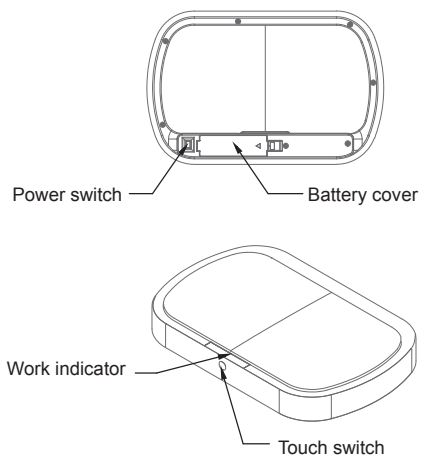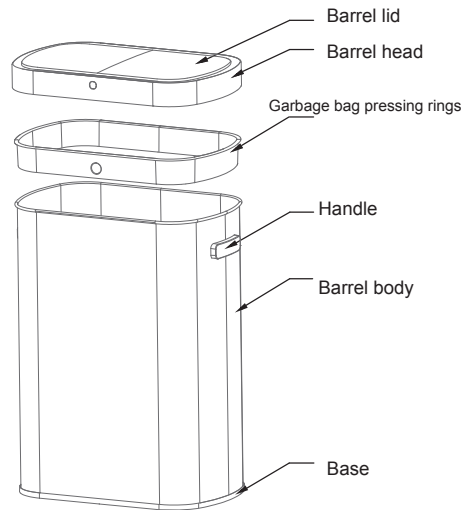

Basic Parameters

Product Name: Smart Sensor Trash Can
Model: UZ8-50L-DB2FR
Rated voltage: 6V
Rated power: 2.2W
Battery parameters: 4×1.5VAA dry batteries
Product size: 417mm x 217mm x 587mm
Standard: GB4706.1-2005/IEC60335-1:2004(Ed4.1)
Precautions: Please use genuine high-performance alkaline batteries.

Instructions For Use

1. Install the battery

This product needs to use 4 AA alkaline batteries, remove the barrel head, open the battery cover at the bottom of the barrel head, put the 4 AA alkaline batteries into the battery compartment according to the positive and negative electrodes, and finally cover the battery cover.

2. Power on and off

Toggle the power switch, when the "I" sign is pressed, the working indicator will be on for 3 seconds and turn off the machine after it is turned off. Toggle the power switch, when the "O" sign is pressed, the working indicator will be on for 3 seconds and the machine will be turned off.

3. Infrared induction to open the cover

- (1) When the human hand or other object is close to the range of about 30cm above the front sensing area of the barrel lid (the specific range will change due to the use environment of the product), the barrel lid will be automatically opened, and the indicator light will flash white ; When a human hand or other object leaves the sensing area of the barrel lid, the barrel lid will automatically close after 5 seconds.
- (2) After the induction opens the cover, if the human hand or object still stays in the induction area, the lid will remain open.

4. Manually open and close the lid

- (1) When the lid is closed, touch the button on the sensing area to open the lid and open the cover, and the working indicator light is each Flashes white light once every 3 seconds.

- (2) Touch the button when the lid is open, and the lid will be closed after 15 minutes without operation
The cover is automatically closed, and the circuit program enters the automatic sensing state after the cover is closed.

5. The battery is insufficient

- (1) When the battery is low, the work indicator light is red.
- (2) After the red light is turned on to indicate that the battery is insufficient, the remaining power can be used for less than a week.



Precautions

1. Please pay attention to the product fireproof, moisture-proof and foreign matter ingress.
2. Do not directly rinse the trash can with water or use it in a wet situation, as it may cause the electronic components inside to be exposed to moisture.
3. If water enters accidentally, please take out the battery immediately and put it in a ventilated place to dry before use.
4. When installing the battery, please pay attention to the positive and negative poles of the battery, and use genuine high-performance alkaline batteries. If the battery is exhausted or not used for a long time, it should be replaced or removed in time to prevent the battery from leaking and damaging the components.
5. The battery version should use high-performance alkaline batteries.
6. When the automatic shutdown phenomenon occurs during normal use, please replace the battery in time in order to enter the low battery prompt mode.
7. The performance of the battery will be reduced when used in a low temperature environment, if the ambient temperature is too low, please use low temperature Battery.
8. The product should avoid falling, otherwise it may cause damage to the product.
9. The product cannot be forced on the upper cover by external force (or shake the lid back and forth quickly) during operation, otherwise it may be Causes irreversible damage to the product.
10. The product should not be too close to high-frequency electromagnetic radiation products, such as micro-refrigerators, induction cookers, etc., otherwise it may be Interfere with the use of the product.
11. Please avoid direct exposure to strong light in the sensing area, which will lead to abnormal sensing sensitivity.
12. The sensitivity of the sensing area to the black surface is low, if the volatile body is a black surface, the cover may be abnormal.
13. To prevent the product from accidentally triggering the opening and closing, please keep the vertical distance above the sensor head free of obstructions.